

ESTEEM

Model 192M Product Sheet

Wireless Solution

ESTeem® wireless modem products provide a "Wireless Solution" by eliminating conventional hard wiring, leased phone lines, or cellular costs.

The ESTeem Model 192M comes with the industry standard RS-232C, RS-422, and RS-485 asynchronous communications ports to give the user a new dimension to "Local Area Networking".

Our packet burst, narrow band, frequency agile, VHF communications products allow the user to create a "Radio Area Network" of up to 255 users on a single frequency. The packet burst communications technique was chosen to give the system very high data integrity in high noise industrial environments. The ESTeem incorporates forward error correction and CRC error checking that provides received data accuracy of greater than one part in 100 million.

Packet Protocols

By using a Carrier-Sensed-Multiple-Access (CSMA) communication protocol no polling station or token is required in the ESTeem network. When an ESTeem has information to send, it will check to see if the channel is clear before transmitting its packet and await an acknowledge. The ESTeem is a Master/Slave system, meaning any ESTeem of the same model type can communicate with any other ESTeem of the same model type.

Data Privacy

Transmitted data privacy is insured by the use of an interleaving technique of the modulated data, user definable commands for unit addressing, network addressing, and security lock-out of software programming.

Increased Operating Range

The internal Digi-Repeater feature allows the user to increase operating range by relaying transmissions through a maximum of three ESTeems to reach the destination ESTeem. An ESTeem can operate as an operating node, a repeater node, or both simultaneously for added flexibility.

User Friendly

The ESTeem has user programmable software to allow the configuration of the unit for any application. These commands are saved in the ESTeem's internal non-volatile memory.



FEATURES

Transceiver

- 19,200 bps RF data rate
- 150 to 174 MHz VHF operating frequencies
- Integral Digi-Repeater
- Frequency of operation Software Programmable
- Receiver Squelch Software Programmable
- Remote Programmability of all features over the RF or Infrared Interfaces
- Radio Diagnostic Programs included
- Radio Self-Test
- Packet Monitor
- Received Signal to Noise Ratio
- Received Signal Strength Output (Optional)

Interfaces

- RS-232C, RS-422, and RS-485 communications ports for hardware interfacing
- Infrared communication port for Local Programming and Diagnostics

Protocols

- Integral PLC And RTU Protocol Drivers
- Point-to-Point Protocol
- Point-to-Multi-Point Protocol
- Polled With Report-By-Exception Protocol
- Contingent Protocol
- Transparent Protocol

WARRANTY

- One Year

Technical Specifications Model 192M



ESTeem Software Utility Program For

- Setup/Programming
- Diagnostic Programs
- Interference Testing
- PC Terminal Emulation
- Polling Program
- Site Survey Instructions



Infrared Communications Port for Remote Programming and Diagnostics Without Interruption Of The Wireless Radio Area Network

Communication Interfaces

- RS-232
- RS-422
- RS-485

RF POWER

- 2 Watts (4 Watts optional)

RF DATA RATE

- 19,200 bps @ 25 KHz Channel Spacing
- 9,600 bps @ 12.5 KHz Channel Spacing

RECEIVER SENSITIVITY

- < 1 uV

RECEIVER SQUELCH

- Four Levels · Software Programmable

MINIMUM RADIO TURN AROUND TIME

- < 30 ms + Data (W/ACK)
- < 15 ms + Data (W/O ACK)

POWER REQUIREMENTS

- 10.8-16 VDC input voltage
- 400 mA Receive
- 1.5 A Transmit (2 w)
- 2.0 A Transmit (4 w)

SIZE

- 2.45 in. Height
- 8.16 in. Width
- 9.37 in. Length

WEIGHT:

- 5 lbs.

ENVIRONMENT

- -30° to 60° C
- 95% Non-condensing

WARRANTY

- 1 Year

SWITCHES

- CPU Reset
- RS-232/422/485 Setup

LED INDICATORS

- Power On
- Receiver Carrier Detect
- Transmitter Enable
- Link Connect/Disconnect
- Auto Connect Enable
- RS-232/422/485 Framing Error

I/O - CONNECTORS

- RS-232C/422/485 - 25 Pin Sub D Female
- Infrared Programming Port
- Antenna Output - TNC
- Input Power - 2 Pin Molex Female

ADDRESSING RANGE

- 1 to 254

DATA INPUT

- RS-232/422/485 Async
- Selectable 600 to 19,200 baud
- 7 to 8 data bits
- Even, Odd or no parity
- One or Two Stop Bits

DATA BUFFERS

- ...Transmit 4000 bytes
- ...Receive 4000 bytes

FLOW CONTROL

- Hardware or Software

DATA TRANSMISSION PROTOCOL


- Carrier Sensed Multiple Access with Collision Detection (CSMA-CD)

ERROR CHECKING

- Forward Error Correction and 32 Bit Cyclic Redundancy check (CRC) with Packet Acknowledge and Retry

FREQUENCY OF OPERATION

- 1500 to 174 MHz.
- 6.25 KHz. (5 KHz Opt.) Channel Spacing -Software Programmable
- Simplex

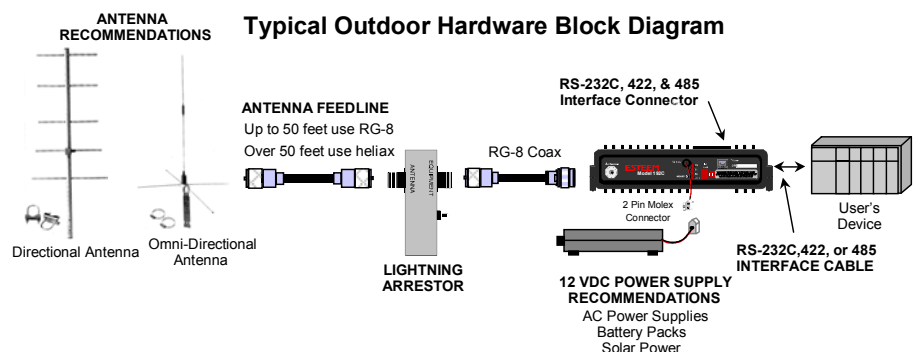

Specifications subject to change without notice.
© Electronic Systems Technology, Inc.
Revised: 11 April 06



ELECTRONIC SYSTEMS TECHNOLOGY, INC.

415 North Quay Street • Kennewick, WA 99336
PH. (509) 735-9092 • Fax (509) 783-5475

www.esteem.com